

DS smart[™] Hardware Assembly Instructions

We have pre-assembled several components for you. To complete hardware assembly, please view the assembly video and begin with Chapter 6, "Attaching the Tablet Holder to the Stand" or use instructions below.

Video link: http://bit.ly/TabletMountAssembly

Tablet Case, Tablet Mount & Power Strip Assembly


You will need a small flathead screwdriver, a medium Phillips screwdriver and hex key (included) for assembly. Alternatively, you could use a power screwdriver/drill set. Please lock the wheels on the bottom of the vital signs monitor stand prior to continuing with assembly.



Attaching the Tablet Holder to the **Stand:** Tablet mounting arm should be attached to the stand pole approximately 8" below the vital signs monitor using the hex key and screws. Tablet holder should face the front of the vital signs monitor. From bottom of tablet, tilt mount assembly all the way up, ending in a 45-degree angle. Then, lock in place by moving lever at top of tablet to the right.





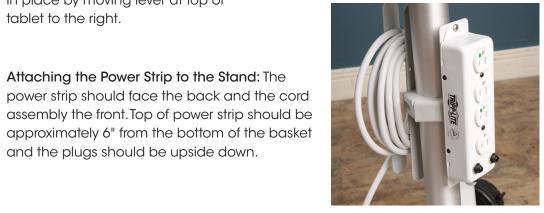



Attaching the Power Strip to the Stand: The

and the plugs should be upside down.





Connecting Equipment Cables: Plug gray vital signs monitor power cord into the second outlet on the power strip. Plug in white tablet charger to power strip and connect white USB tablet cable to charger. Plug white USB tablet cable into top left of tablet.







Attach the Stylus: The stylus should be attached into the headphone jack at the top right of the tablet.



Attaching Cord Clips: Secure the white tablet USB cable to stand pole using the three clips as shown. Note that the clips arrive with the vital signs monitor stand.



